

Impulse Sealer



PFS-200



PFS-450


PFS-300

	PFS-200	PFS-300	PFS-450
Power (kW/V/Hz)	0.3/230/50	0.4/230/50	1.05/230/50
Type	Manual	Manual	Foot
Sealing Length (cm)	20	30	45
Sealing Width (cm)	0.2	0.2	0.2
Thickness (cm)	0.001-0.08	0.001-0.08	0.00-0.09
Weight (kg)	2.4	3.75	21
Dim (LxWxH) (cm)	34x10x18	47x11x20	80x55x25

Strapping Machine (Semi-Auto) (made in Taiwan)



PW-316H

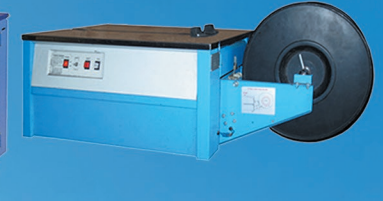

PW-316L

	PW-316H	PW-316L
Power (kW/V/Hz)	0.18/230/50	0.18/230/50
Strap Width (cm)	0.6/0.9/1.2/1.55	0.6/0.9/1.2/1.55
Tension Length (cm)	15-50	15-50
Strapping Speed (sec)	2	2
Min. Package Size(cm)	6	6
Weight (kg)	100	90
Dim (LxWxH) (cm)	91x58x75	149x58x48

Vacuum Packager



DZQ400N



DZQ400TN

	DZQ400N	DZQ400TN
Power (kW/V/Hz)	0.9/230/50	0.9/230/50
Type	Standing	Table Top
Productivity (m ³ /h)	20	20
Sealing Bar (pcs)	2	2
Sealing Bar Size	40x1	40x1
Chamber (cm)	44x42x8	44x42x8
Weight (kg)	95	45
Dim (LxWxH) (cm)	56x50x105	56x50x46

Wrapping Packager



HW-450

	HW-450
Power (kW/V/Hz)	0.3/230/50
Roller Width (cm)	45.2
Head Cut Length (cm)	3.2
Head Shrinking Plate (cm)	38.5x12.3
Weight (kg)	6.5
Dim (LxWxH) (cm)	54x68x20